

# EE820

## CO<sub>2</sub> Sensor for Demanding Applications

The EE820 CO<sub>2</sub> sensor is optimized for use in harsh, demanding applications, such as hatchers, incubators, life stock barns or greenhouses.

### Outstanding Accuracy

A multiple point CO<sub>2</sub> and temperature factory adjustment procedure leads to excellent CO<sub>2</sub> measurement accuracy over the entire temperature working range, so the EE820 can even be installed outdoors.

### Long-term Stability

The EE820 incorporates the E+E dual wavelength NDIR CO<sub>2</sub> sensor, which compensates for ageing effects, is highly insensitive to pollution and offers outstanding long term stability.

### High Resistance to Pollution

With its robust, functional IP54 enclosure with a special filter the EE820 can be employed even in harsh environment.

### Fast Response Time

The fast response time version of EE820 is fitted with a forced air circulation module installed behind the filter.

### Analogue and Digital Outputs


The CO<sub>2</sub> measured data range up to 10000 ppm is available on the analogue output (voltage / current) or on the RS485 interface with Modbus RTU or BACnet MS/TP protocol.

### Easy Configuration and Adjustment

An optional adapter and the free EE-PCS Product Configuration Software facilitate the configuration and adjustment of the EE820.



## Features

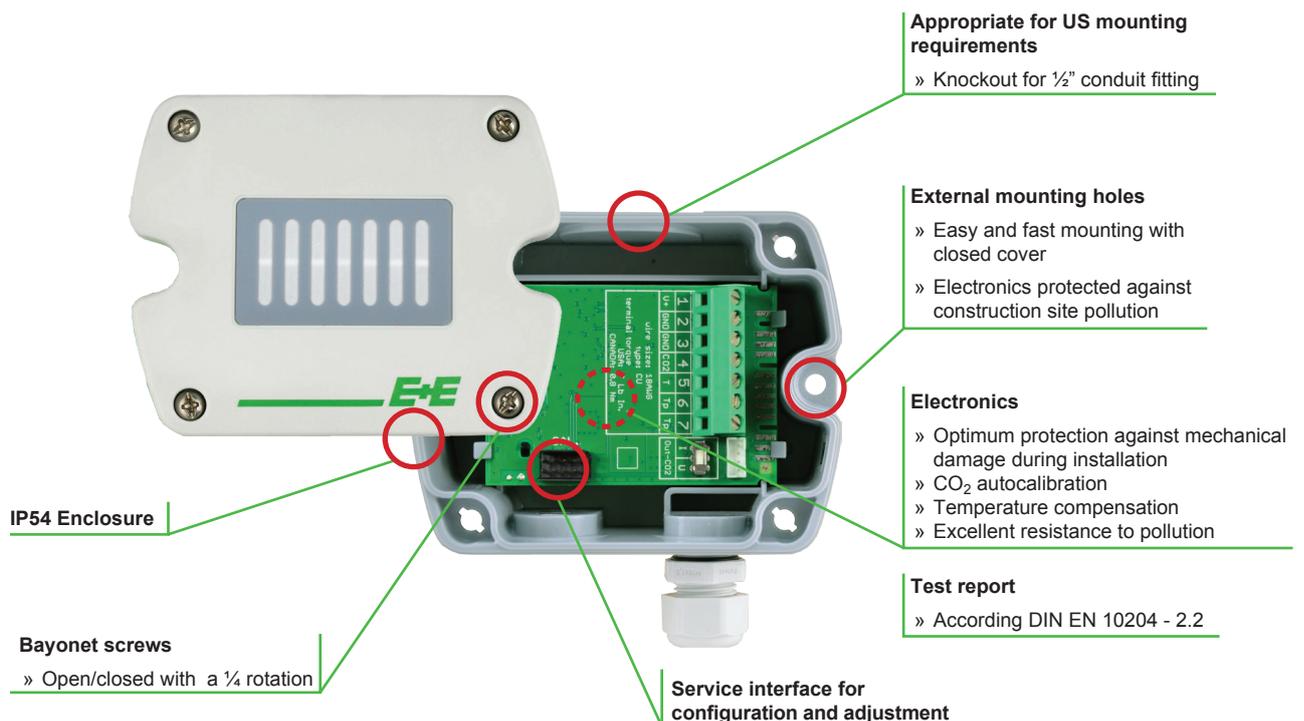

## Technical Data

### Measured values

Measuring principle	dual wavelength non-dispersive infrared technology (NDIR)		
Measurement range	0...2000 / 5000 / 10000 ppm		
Accuracy at 25 °C (77 °F) and 1013 mbar (14.7 psi)	0...2000 ppm:	< ± (50 ppm +2 % of mv)	mv = measured value
	0...5000 ppm:	< ± (50 ppm +3 % of mv)	
	0...10000 ppm:	< ± (100 ppm +5 % of mv)	
Response time $t_{63}$ , typ.	300 s (standard) 140 s (fast, with forced air circulation module)		
Temperature dependency	typ. ± (1 + CO <sub>2</sub> concentration [ppm] / 1000) ppm/°C (-20...45 °C) (-4...113 °F)		
Sample rate	approx. 15 s		

### Output

#### Analogue

0...2000 / 5000 / 10000 ppm	0-5 / 0-10 V	-1mA < I <sub>L</sub> < 1 mA	
	4-20 mA	R <sub>L</sub> < 500 Ohm	R <sub>L</sub> = load resistance

#### Digital Interface

	RS485 with max. 32 unit load devices on one bus		
Protocol	Modbus RTU or BACnet MS/TP		


### General

Supply voltage	24 V AC ±20%	15 - 35 V DC	
Current consumption, typ.	15 mA + output current, for standard response time 60 mA + output current, for fast response time		
Current peak, max.	350 mA for 0.3 s (analogue output) 150 mA for 0.3 s (RS-485 interface)		
Warm up time <sup>1)</sup>	< 5 min		
Enclosure material	Polycarbonate, UL94V-0 approved		
Protection class	IP54		
Electrical connection	Screw terminals 2.5 mm <sup>2</sup> or M12 plug		
Electromagnetic compatibility	EN61326-1	EN61326-2-3	Industrial Environment
	FCC Part 15	ICES-003 ClassB	
Working conditions	-20...60 °C (-4...140 °F)	0...100 % RH (non-condensing)	
Storage conditions	-20...60 °C (-4...140 °F)	0...95 % RH (non-condensing)	



1) for performance according to specification

## Dimensions (mm/inch)

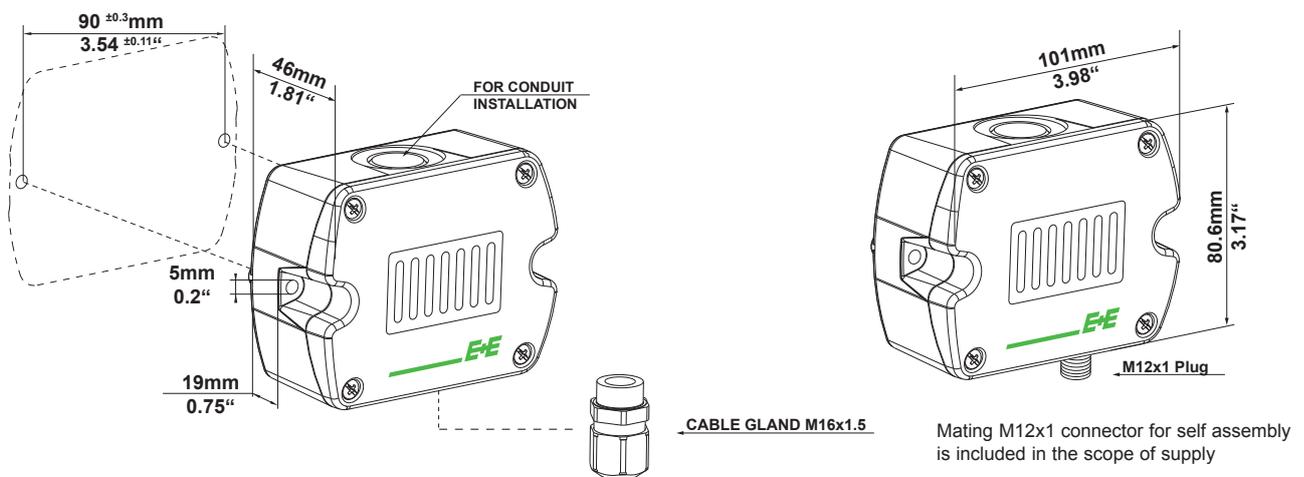

## Ordering Guide

		EE820-		
Hardware configuration	CO <sub>2</sub> range	0...2000 ppm	HV1	
		0...5000 ppm	HV2	
		0...10000 ppm	HV3	
	Output	0-5 V	A2	
		0-10 V	A3	
4-20 mA		A6		
RS485			J3	
Electrical connection	M16 cable gland	E1	E1	
	M12 plug	E9		
Response time	standard	no code		
	fast (with forced air circulation)	AM4		
Setup RS485	Protocol	Modbus RTU <sup>1)</sup>	P1	
		BACnet MS/TP <sup>2)</sup>	P3	
	Baud rate	9600	BD5	
		19200	BD6	
		38400	BD7	
		57 600 <sup>3)</sup>	BD8	
76 800 <sup>3)</sup>	BD9			

1) Factory setting: Even Parity, Stopbits 1; Modbus Map and communication setting: See User Guide and Modbus Application Note at [www.epluse.com/ee820](http://www.epluse.com/ee820).

2) Factory setting: No Parity, Stopbits 1; Product Implementation Conformance Statement (PICS) available at [www.epluse.com/ee820](http://www.epluse.com/ee820).

3) Only for BACnet MS/TP.

## Order Example

### EE820-H1A3E9

CO<sub>2</sub> range: 0...2000 ppm  
 Output: 0-10 V  
 Electrical connection: M12 plug  
 Response time: standard

### EE820-HV2J3E1AM4P1BD6

CO<sub>2</sub> range: 0...5000 ppm  
 Output: RS485  
 Electrical connection: M16 cable gland  
 Response time: fast  
 Protocol: Modbus RTU  
 Baud rate: 19200

## Accessories (see data sheet „Accessories“)

USB configuration adapter  
 Product configuration software  
 Mating M12x1 connector for self assembly  
 Connection cable M12x1 socket - flying leads  
 - 1.5 m (3.3ft)  
 - 5 m (16.4 ft)  
 - 10 m (32.8 ft)  
 Protective cap for female M12 connectors  
 Protective cap for male M12 connectors  
 Power supply adapter

HA011066  
 EE-PCS (free download: [www.epluse.com/EE820](http://www.epluse.com/EE820))  
 HA010707

HA010819  
 HA010820  
 HA010821  
 HA010781  
 HA010782  
 V03

## Support Literature

[www.epluse.com/ee820](http://www.epluse.com/ee820)